


KOMPAKT cable gland

19.6xx

Pressure screw	Brass CuZn39Pb3, nickel-plated
Strain relief clamp	Brass, nickel-plated
Bolts	Stainless steel
Washers	Steel, zinc-plated
Sealing ring	SBR/NBR, multiple perforation
Gland body	Brass CuZn39Pb3, nickel-plated
Connecting thread	Pg as per DIN 40430
Rubber bushing	SBR/NBR, multiple perforation

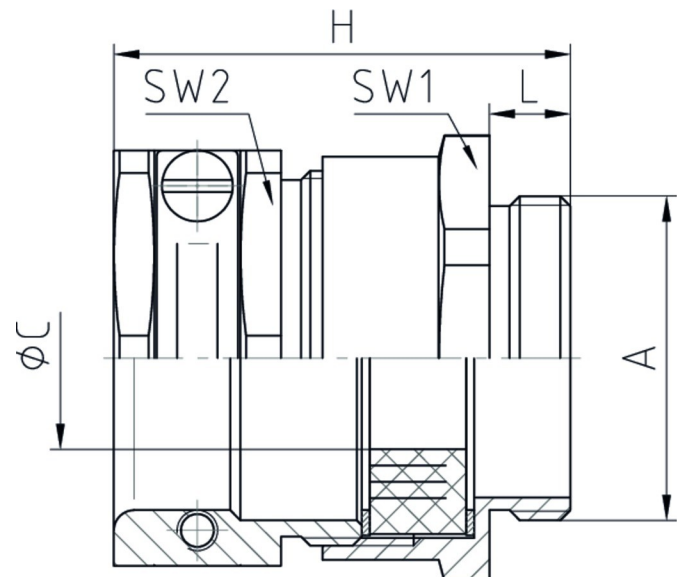


Properties

Temperature range (°C)	-30 +100	• increased anchorage
Protection grade	55	

Features

Connecting thread standard length

A	ØC	L	SW1	SW2	H		Part No.
Pg 9	6 - 8,5	6	17	17	31	100	19.609
Pg 11	7,5 - 12	6	20	20	32	50	19.611
Pg 13,5	8,5 - 13	6,5	22	22	33,5	50	19.613
Pg 16	9,5 - 15	6,5	24	24	34,5	50	19.616
Pg 21	12 - 19	7	30	30	39,5	50	19.621
Pg 29	16,5 - 27	8	40	41	45	25	19.629
Pg 36	29 - 33	9	50	50	61	10	19.636
Pg 42	34 - 39	10	57	57	66	5	19.642
Pg 48	39 - 45	10	64	64	67,5	5	19.648

* Clamping range of anchorage