



## Rocker switches



### A8 Series

**Square cut out - 19X13**  
**ENEC electrical rating up to 10A**






- Illuminated or not
- Esthetics similar to A1 switches series and A5 signals light series
- Double-pole

#### Products

#### Accessories

*Customising on demand*


## Electrical features

ENEC electrical rating up to	<b>10A</b>
Electro-mechanical cycles number up to	<b>50.000</b>
Room temperature up to	<b>125 °C</b>
Flammability	<b>UL 94 V2</b>
Heat and fire resistance	<b>GWFI 850 °C</b> <b>GWIT 750 °C on demand</b>
Contact gap	<b>≥ 3 mm</b>
Approvals available (to check according to the rating of each single material code)	    
Reference standards	<b>EN 61058</b> <b>UL 1054</b>

## Wiring diagrams

- Double-pole switch
- Illuminated double-pole switch

## Cut out (mm)

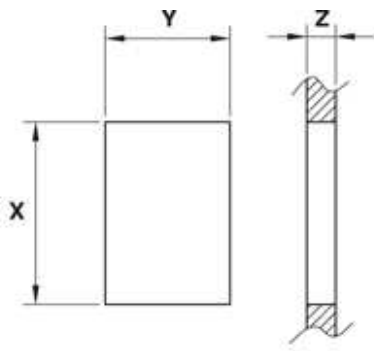

Z	Y	X
0.7 ... 1.25	13.0 ± 0.1	19.0 + 0.2
1.25 ... 2	13.0 ± 0.1	19.3 + 0.2
2.0 ... 3	13.0 ± 0.1	19.6 + 0.2

Stampa scheda