

Tau Led

For oven equipped with:



cooking modes selector



Capillary thermostat



» The product is a monolithic electronic control integrated in plastic housing. It allows to manage time. The User Interface is made by Led display available in different colors and mechanical switches. The output is a power relay. Two sizes of housing are possible. An intergrated keyboard with 3 buttons is also available on the large frame.



Large Frame, keyboard integrated



Large Frame



Small Frame

Characteristics:

Minute Minder, Duration and Delayed start function available

Maximum Ambient Température: 120°C

Supply Voltage: 230VAC 50/60Hz self adapting
Under 1 Watt consumption in standby

Output:

1 relay 16 Amps 250V


1 buzzer

Input:

Up to 6 buttons for large frame, 3 buttons for integrated keyboard version and 1 high voltage input (P4)

Up to 5 buttons for small frame

6.3 x 0.8mm Tabs terminals for connections

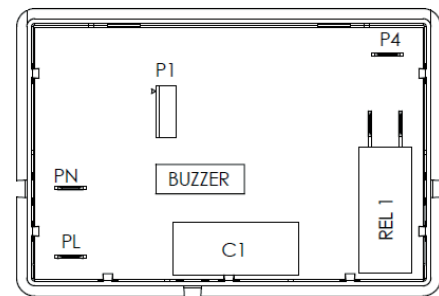

Dimensions:

