



Push-button switches



TOUCH Series




Rear panel cut out
ENEC electrical rating up to 8A

- Soft feeling
- Momentary switch with 5 interlock push-buttons version available
- Noiseless jerky mechanism
- Applications: cooker hoods, coffee machines, microwave ovens

Customising on demand

Products


Electrical features

ENEC electrical rating up to	8A
Electro-mechanical cycles number up to	10.000
Room temperature up to	110 °C
Flammability	UL 94 V2
Heat and fire resistance	GWFI 850 °C GWIT 750 °C
Contact gap	< 3 mm
Approvals available (to check according to the rating of each single material code)	  
Reference standards	EN 61058 UL 1054

Wiring diagrams

- 5 modules keyboard
- Double-pole momentary switch
- Double-pole switch
- Double-pole two-way momentary switch
- Double-pole two-way switch

Cut out (mm)

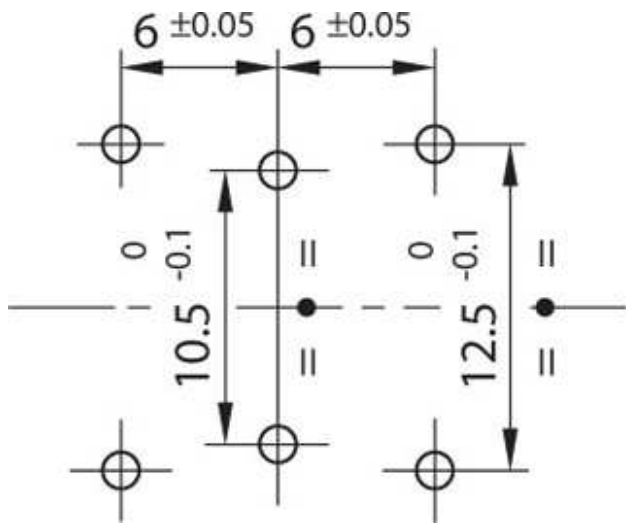

Stampa scheda