Rocker switches

B1 Series

Square cut out - 30X11
ENEC electrical rating up to 16A

- Switch or momentary switch
- Illuminated or not
- IP protection degree increased by B1PRT
- Applications: coffee machines, cooker hoods

Customising on demand

Products

Accessories

Electrical features

ENEC electrical rating up to	**16A**
Electro-mechanical cycles number up to	**50.000**
Room temperature up to	**120 °C**
Flammability	**UL 94 V2**
Heat and fire resistance	**GWFI 850 °C**
	GWIT 750 °C on demand
Contact gap	**≥ 3 mm**
Approvals available (to check according to the rating of each single material code)	
Reference standards	**EN 61058** **UL 1054**

Wiring diagrams

- Illuminated single-pole switch
- Normally opened single-pole momentary switch
- Single-pole intermediate switch 1 momentary position
- Single-pole intermediate switch 2 momentary positions
- Single-pole intermediate switch 3 positions
- Single-pole switch
- Single-pole two-way switch

Cut out (mm)

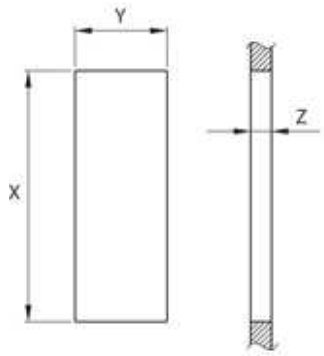

Z	Y	X
0.7 ... 1.25	$11.0^{+0.2}_{0}$	$30.0^{0}_{-0.1}$
1.25 ... 2.0	$11.0^{+0.2}_{0}$	$30.2^{0}_{-0.1}$
2.0 ... 3.0	$11.0^{+0.2}_{0}$	$30.6^{0}_{-0.2}$
3.0 ... 4.0	$11.0^{+0.2}_{0}$	$30.8^{0}_{-0.2}$

Stampa scheda