



Rocker switches



GP Series

Square cut out - 19X13
ENEC electrical rating up to 12A




- Designed for capacitive load 120A in-rush
- Illuminated or not
- IP protection degree increased by GPCAP
- Applications: vacuum and steam cleaners

Products

Accessories

Customising on demand



Electrical features

ENEC electrical rating up to	12A
Electro-mechanical cycles number up to	50.000
Room temperature up to	125 °C
Flammability	UL 94 V2
Heat and fire resistance	GWFI 850 °C GWIT 750 °C on demand
Contact gap	≥ 3 mm
Approvals available (to check according to the rating of each single material code)	  
Reference standards	EN 61058 UL 1054

Wiring diagrams

- Double-pole switch
- Illuminated double-pole switch
- Single-pole switch

Cut out (mm)

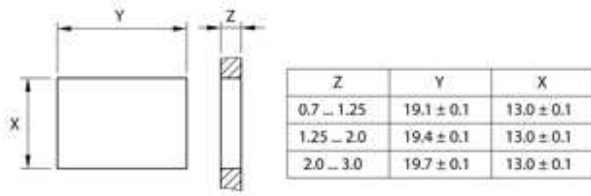

Stampa scheda