





Signal lights: Signal lights Cut-out Ø 8-10 | SX28 | Lens 28

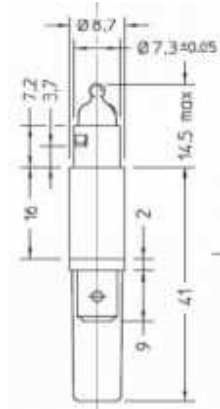

Lens dimensions

ø 10 / 12.5 mm

Hole

ø 9



Panel thickness

0.8 - 2.0 mm

Wiring diagrams	Approvals	Connections
<p>with Led A.C. current including ballast and diode</p> <p>with Led A.C. current including ballast and diode</p> <p>with Led D.C. current or A.C. low voltage including ballast</p> <p>with incandescent lamp</p> <p>with neon or fluorescent lamp and ballast</p> <p>with neon or fluorescent lamp</p>		

Temperature: From T75° C to T150° C according to the version

Colour: Red, orange, green, blue, colourless. Other colours available on customer's request

Wire ends and connectors: PVC or silicone cables, available pre-stripped wires end 6.5 mm or with clamped connectors

Light source : LED: available for every voltage

Incandescence: 12V - 24V

Neon: from 125V

Stampa scheda