





## Signal lights: Signal lights Cut-out Ø 6 | SX27 | Lens 27

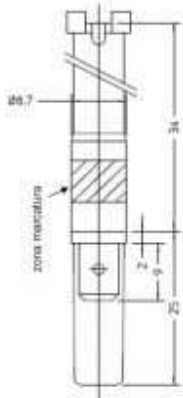

Lens dimensions

ø 7 mm

Hole

Ø 6



Panel thickness

0.5 - 4.0 mm

| Wiring diagrams  | Approvals | Connections |
|--|-----------|-------------|
| <p>with Led A.C. current including ballast and diode</p> <p>with Led A.C. current including ballast and diode</p> <p>with Led D.C. current or A.C. low voltage including ballast</p> <p>with incandescent lamp</p> <p>with neon or fluorescent lamp and ballast</p> <p>with neon or fluorescent lamp</p> |           |             |

**Temperature:** From T75° C to T150° C according to the version

**Colour:** Red, orange, green, blue, colourless. Other colours available on customer's request

**Wire ends and connectors:** PVC or silicone cables, available pre-stripped wires end 6.5 mm or with clamped connectors

**Light source :** LED: available for every voltage

Incandescence: 12V - 24V

Neon: from 125V

Stampa scheda