Push-button switches

SXL4 Series

Square cut out - 19X13
ENEC electrical rating up to 16A

- IP protection degree increased by PVC cover
- Customising push-button
- Soft rounded push-button available
- Applications: coffeemachines, washing machines

Customising on demand

Products

Accessories

Electrical features

ENEC electrical rating up to	**16A**
Electro-mechanical cycles number up to	**50.000**
Room temperature up to	**125 °C**
Flammability	**UL 94 V2**
Heat and fire resistance	**GWFI 850 °C**
	GWIT 750 °C
Contact gap	**≥ 3 mm**
Approvals available (to check according to the rating of each single material code)	
Reference standards	**EN 61058** **UL 1054**

Wiring diagrams

- Double-pole momentary switch
- Double-pole switch
- Illuminated double-pole switch
- Illuminated single-pole switch
- Single-pole momentary switch
- Single-pole switch

Cut out (mm)

PANEL CUT-OUT

S	D_1	D_2	E
0.5-1.2	12.9	13.4	19
1.2-2	12.9	13.4	19.3
2-3	12.9	13.4	19.6

SUGGESTED D1

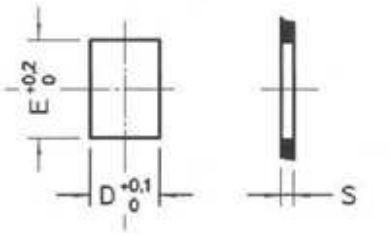

Stampa scheda