


Poliammide **PA6.6** nera
Autoestinguente **UL94V0**
GWIT775°C (EN 60695-2-13)
Temperatura di esercizio **T105°C**
Contatto in ottone OT58 nichelato
Guarnizioni in silicone
IP68 per 120h a 4mt

Black polyamide **PA6.6**
Self-extinguishing **UL94V0**
GWIT775°C (EN 60695-2-13)
Working temperature of **T105°C**
Contacts in brass OT58, nickel plated
Silicone waterproof rubbers
IP68 for 120h at 4mt

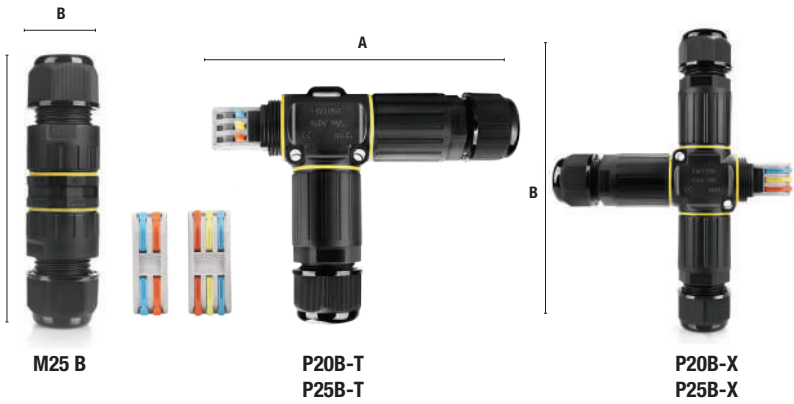

Approvazioni / Approvals

CE

CEI EN 60998-1 / CEI EN 60998-2-1 / CEI EN 62444

Legenda delle quote
Legend for dimensions

Descrizione / Description		Art		Art				Art			
Connettore Connector		M25 B		OK-P20 B				OK-P25 B			
Sagoma Shape		I		T		X		T		X	
Numero poli e codice Number of poles and code		2p	4572200	2p	4570200	2p	4571200				
		3p	4572300					3p	4573300	3p	4574300
Specifiche tecniche Technical characteristics		2,5/4mm² - 32A - 450V									
		14AWG - 20A - 300V									
A	Lunghezza / Lenght	108 mm		148 mm		148 mm		165 mm		165 mm	
B	Larghezza / Width	30 mm		89 mm		148 mm		100 mm		165 mm	
Accessori / Accessories:											
Diametro foro gommini standard e range dei cavi Standard rubbers diameter and cables range		Ø 8,5 mm (5 - 9 mm)		Ø 8,5 mm (5 - 9 mm)				Ø 8,5 mm (5 - 9 mm)			
Altri gommini disponibili Other available rubbers		Ø 12 mm (9 - 12 mm)		Ø 12 mm (9 - 12 mm)				Ø 12 mm (9 - 12 mm)			
		Ø 14,5 mm (10 - 14 mm)						Ø 14,5 mm (10 - 14 mm)			
Confezione e imballo Packing and box		25 / 250 pz/pcs		20 / 200 pz/pcs				10 / 100 pz/pcs		5 / 50 pz/pcs	