





# >> PA4534

## Built-in terminal box

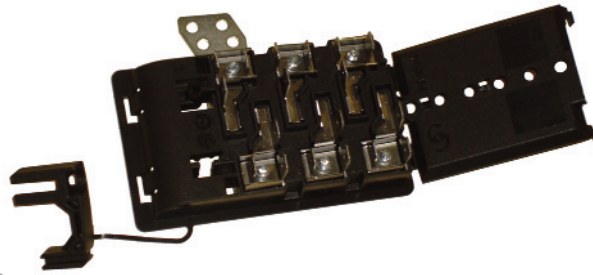


### Technical data

	IEC STANDARDS	AMERICAN STANDARDS
<b>Ratings</b>	450V - 41A	300V - 40A
<b>Wire size</b>	2.5 ÷ 6.0 sqmm	8 ÷ 22 AWG (18 lb/in)
<b>Working Temperature</b>	- 5 ÷ 125°C (short time 155°C)	23 ÷ 221°F
<b>Plastic Material</b>	Polyamide, UL 94 V2, GWIT 775°C, GWFI 850°C	
<b>Metal Parts</b>	M4 (2.0Nm) zinc plated steel screw; 6.3 x 0.8 zinc plated steel tab insert; Other parts made in zinc plated steel	
<b>Cable clamp screw for plastic use</b>	3.5 x 15 mm (0.13" x 0.59") - 0.8Nm - P.N. 910189	

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	CA02.03196	6.0 sqmm - 450V - 41A - 125°C	EN 60998-1; EN 60998-2-1; EN 61210
	40024729	6.0 sqmm - 450V - 41A - 125°C	E 60335-1 (VDE 0700-1); EN 60998-1, EN 60998-2-1 (VDE 0613-1,2-1) EN 61210 (VDE 0613-6)
	E 225540 Vol.2, sec.1	8-22 AWG - 300V -35A - 105°C	UL 1977; C22.2 No. 182-3 - M1987

### Dimensional drawing

I dati tecnici possono essere modificati senza preavviso. / The technical data can be subject to changes without notice.

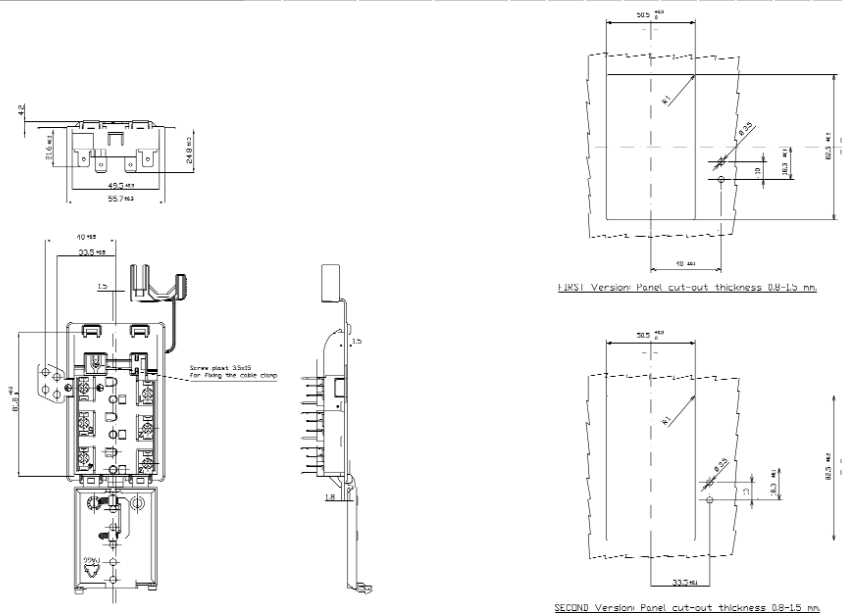

PDF created with pdfFactory trial version [www.pdffactory.com](http://www.pdffactory.com)



# >> PA4534

---

**ITW** Elettrogibi

## Packaging

Type	P-N	Pack.	Dim. Pack. (LxHxP)	Weight (Kg)
PA4534	9963231301	200	60x40x39	13.5
PA4534 (with screw 3.5x15)	9963941301	200	60x40x39	13.5

## >> Notes

---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---