
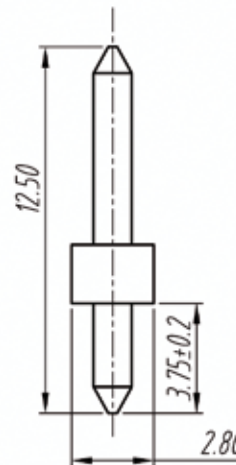


euro-block

product specification

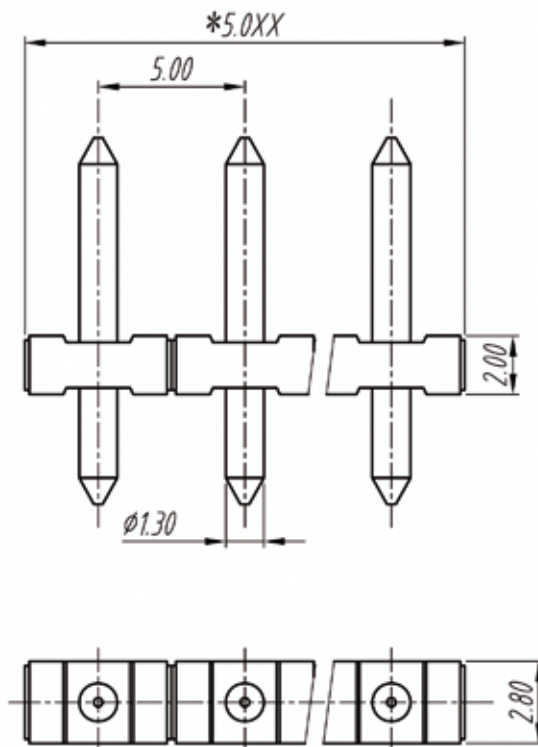

Electrical

Standard: UL-IEC

Rated voltage: 300V-250V

Rated current: 10A-212A

Withstanding voltage: AC2000V/1Min

Mechanical

Temp.Range: -40°C~+105°C

Dimensions

Pitch: 5.00mm (0.197")

Poles: 2p-xxp


Material

Housing: PA66, UL94V-0

Pin header: Brass, Tin plated

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		 short angle sid								
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all	to 6	over 6 to 10	to 10 to 50	over 50 to 120	all	to 5	over 5 to 30	over 30 to 120	over 120 to 480			
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
						
euro-block					NAME	CLM