


Ø 6mm

TBF/06R/SU

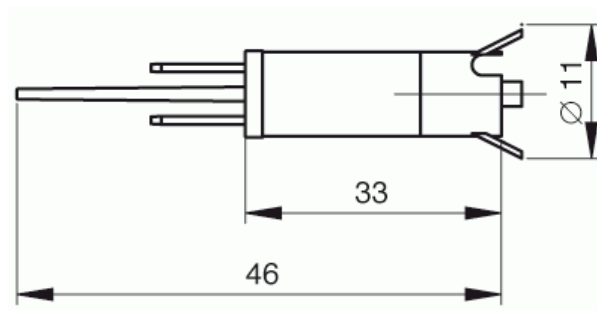

The lens is inserted from the front of the panel. it fits in the case of the light indicator situated behind the hole in the back of the panel.

This light indicator has 3 points to lay on the back of the panel.
it's shorter than the type 06R.

Working voltage	6V ; 12V ; 24V ; 48V ; 110V ; 250V ; 400V
Max temperature	120°C ; 150°C
Hole diameter	6mm +0,2-0
Panel thickness	from 0,5mm to 2mm
Way of locking on the panel	self locking
Lamp type	incandescent lamp ; neon/fluorescent lamp ; LED lamp lamp
Connection way	male faston 6,3x0,8mm ; male faston 4,8x0,8mm
Lens type	suitable for a 6mm hole (lens type: SU)
Lens – case connection	extractable
Approvals	VDE - UL/CSA - CE